


1. OUTER WALL 200MM THICK
2. INNER WALL 100MM THICK
3. PROVIDING RATIO OF MOTAR IN BRICK WORK MASONARY 1:4

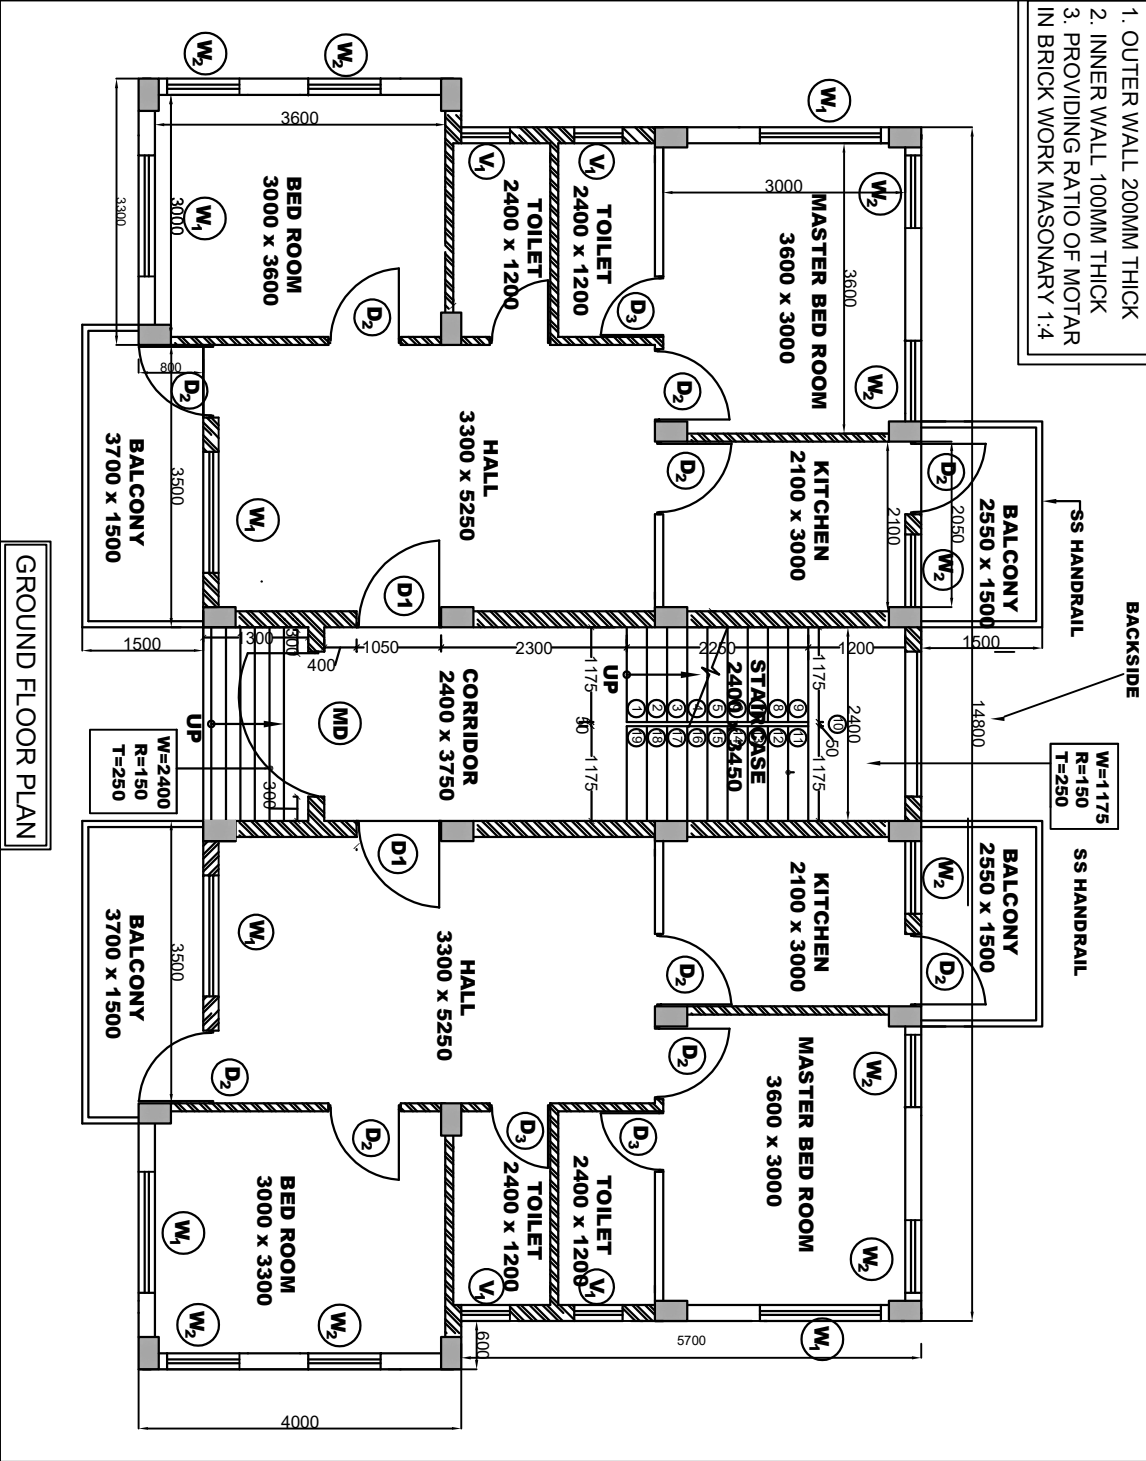

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETER UNLESS AND OTHERWISE SPECIFIED
2. DRG SHOULD TO BE SCALED & WRITTEN DIMENSION ARE TO BE SCALED
3. DISCREPANCY IF ANY SHALL BE CLARIFIED FROM THE CONSULTANT BEFORE COMMENCEMENT OF WORK.
4. ALL DETAILS SPECIFICATION S SHALL BE AS PER IS CODE OF PRACTICE
5. FOR OTHER DETAILS REFER STRUCTURAL AND OTHER DRAWINGS
6. THIS DRAWINGS IS THE SOLE PROPERTY OF M/s THE DESIGN GROUP AND SHOULD NOT BE COPIED IN WHOLE/ PART
7. PROVIDING SLAB HEIGHT 30MM

DIMENSION OF ROOMS/HALL S SHALL INCREASE

Sl. No.	Type	Size	Sl. Title	Descriptions	
1	MD	1.50 x 2.1	00	2.10	Single half door and detail
2	D1	1.05 x 2.1	00	2.10	Single half door and detail
3	D2	0.9 x 2.1	00	2.10	Single half door and detail
4	D1	0.75 x 2.1	00	2.10	Single half door and detail
5	W1	1.5 x 1.2	0.00	2.10	Window and detail
6	W2	0.9 x 1.2	0.00	2.10	Window and detail
7	V1	0.35x 0.35	2.10		Ventilator and detail

ARCHITECT :-

SIGNATURE:-

PROJECT TITLE :-

DRAWING TITLE :- GROUND FLOOR PLAN
WORKING DRAWING
(2 BRK S/HK QUARTER)

SCALE 1:50

DELT BY:

DRAWING NO.

REVISION: 0

DATE:

REMARKS: WORKING DRAWING

FLOORING DETAIL OF GROUND & FIRST FLOOR

SL. No	SPACE	FLOORING		DADO		SL. No	SPACE	FLOORING		DADO	
		SPACIFICATION	MAKE	SPACIFICATION	MAKE			SPACIFICATION	MAKE	SPACIFICATION	MAKE
1	Front & Rear Balcony	600mm x 600mm Kota Stone Flooring	-----	Kota Stone Skirting up to 150mm High	-----	5	Window & Door Sill	Single Piece Granite Stone	LAKHA RED / SHAHI RED	-----	-----
2	Staircase Below Hall, Bed Room & Corridor	Vitrified Flooring Multi Charge Full Body Mat Finish 600mm x 600mm	Sahara Group-IV of Multi Charge, NITCO	Glossy Vitrified Skirting up to 150mm High	Sahara Group-IV of Multi Charge, NITCO	6	Toilet	300mm x 300mm Ceramic Tile Flooring	Puktraj Tile, Antiskid, NITCO	Crystal peach Paper cut edge Tile, NITCO	-----
3	Kitchen	Vitrified Flooring Multi Charge Full Body Mat Finish	Sahara Group-IV of Multi Charge, NITCO	(300mm x 300)mm Ceramic Glazed Wall Tile Dado up to 2100mm High	Crystal Peach, Paper cut edge, NITCO	7	Staircase Landing	Single Piece Granite Stone Flooring	LAKHA RED / SHAHI RED	Crystal Peach, Paper cut edge, NITCO	-----
4	Entrance Step	Double Piece Granite (1200x250)each on tread	LAKHA RED / SHAHI RED	Double Piece Granite (1200x150)each on riser	LAKHA RED / SHAHI RED	8	Staircase	Single Piece Granite Stone Flooring	LAKHA RED / SHAHI RED	-----	-----